WREKIN
MAKE EVERY DAY BETTER

DBH0B3/1512

Tristar Grade B surface box with integrated sleeve 125mm x 150mm clear opening with 75mm frame depth

CHARACTERISTIC	VALUE
Range	Tristar
Clear opening length (mm)	125 x 150
Overall frame length (mm)	Ø 235
Frame depth (mm)	75

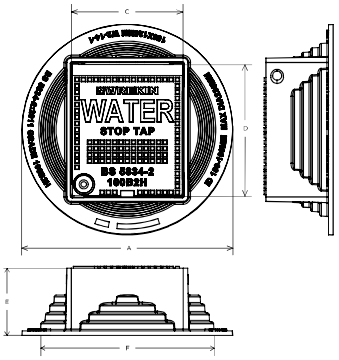

SPECIFICATION

GENERAL INFORMATION

Stock code	DBH0B3/1512
Primary material	Ductile iron
Range	Tristar
Category	Surface box
Flanges	4
Compatible pipe diameters	150mm, 160mm, 170mm, 180mm

STANDARDS, CLASSES AND GROUPINGS

Standards	BS5834
BS 5834 Grade	B

PACKAGING AND HANDLING

Full pallet quantity	200

DIMENSIONS

Frame shape	Circular
Manhole shape	Square
Overall frame (A x B)	Ø 235 mm
Clear opening (C x D)	125 mm x 150 mm
Frame depth (E)	75mm
Base opening (F x G)	Ø 185 mm

EPD DATA

Total life cycle (cradle to grave) 7.29 kg CO_2 equivalent

BRE Global Verified EPD

Full LCA data available here

Tel: 01543 440 440
Fax: 01543 440 444
info@wrekinproducts.com
wrekinproducts.com

bsi Manholes Drainage and Gully Tops KITEMARK™ KM 34066
bsi BES 6001 Responsible Sourcing of Construction Products CERTIFIED BES 830099
bsi ISO 9001 Quality Management Systems CERTIFIED FM 32898 ISO 14001 Environmental Management CERTIFIED EMS 758038
SGS UKAS MANAGEMENT SYSTEMS GB15/93883

CCPI ASSESSED

FEATURES

- Captive hinges incorporate a fixed hinge mechanism and support lifting during inspection and maintenance access.

ACCESSORIES

STOCK CODE	DESCRIPTION
PC/UNIFORM/151076	Uniform chamber adjustment unit 760mm x 100mm x 15mm
PC/UNIFORM/251076	Uniform chamber adjustment unit 760mm x 100mm x 25mm
YPCR/U6.5	6.5Kg Unipak® rapid curing polyester resin mortar
PC/UNIWEDGE/755012	Uniform support wedge 120mm x 50mm x 75mm

- All information provided is subject to change without notice. While every effort is made to ensure accuracy and relevance, Wrekin Products Ltd. does not warrant the completeness or reliability of the information contained herein. Photographs, illustrations, and other visual materials are provided for illustrative purposes only.
- Wrekin Products Ltd. reserves the right to make design amendments or improvements to any product at any time, where such changes enhance performance or durability, without affecting compliance with the stated standards.
- Where errors or omissions are identified, amendments will be made as quickly as possible.
- It is the responsibility of all users to satisfy themselves the above data is current.
- All values stated are nominal within 2.5% tolerance.
- Installation details are available in theknowledge base.
- All Wrekin products are supplied subject to ourterms and conditions of sale.
- If you require further technical details beyond those available on this datasheet, pleasecontact us.

Tel: 01543 440 440
Fax: 01543 440 444
info@wrekinproducts.com
wrekinproducts.com